

ES15-15ES



ELECTRIC STACKER 1.5T

1500 kg 4165 mm 24 V AGM



The ES15-15ES is ideal for small-to-medium warehouses, retail backrooms, and light manufacturing facilities requiring efficient pallet stacking. Thanks to its compact chassis (800 mm width) and tight turning radius of 1500 mm, it performs exceptionally in narrow aisles. Safety features such as emergency reverse button, anti-rolling back brake, and automatic lowering switch enhance safe operation, while crawl speed ensures precision in confined areas.

SPECIFICATION	REF	UNIT	VALUE
Manufacturer			EP
Model designation			ES15-15ES
Battery voltage		V	24
Rated capacity	Q	kg	1500
Load centre distance	c	mm	600
Service weight		kg	755
Height, mast lowered	h ₁	mm	2128
Lift	h ₃	mm	3227
Height, mast extended	h ₄	mm	374
Overall length	l ₁	mm	3
Overall width	b ₁ /b ₂	mm	174
Length to face of forks	l ₂	mm	675
Fork dimensions	s/e/l	mm	800x170x1150
Turning radius	Wa	mm	1500
Drive			Electric
Operator type			Pedestrian

Features

Powerful and reliable AC system

The innovative AC drive provides accurate control, strong power, and smooth performance. Combined with a durable hydraulic system and high-quality components, it ensures reliable uptime in daily warehouse operations.



Compact chassis with tight turning radius

At only 800 mm wide, the ES15-15ES is designed for narrow aisles and confined workspaces. Its 1500 mm turning radius makes it agile and efficient even in dense warehouse layouts.

Maintenance-free energy solution

Equipped with a 24V/125Ah maintenance-free battery and onboard 15A charger, the ES15-15ES allows convenient charging without the need for external equipment, reducing downtime and operating costs.



Operator-focused safety and comfort

Features such as the emergency reverse button, anti-rollback brake, and automatic lowering switch enhance safety. The ergonomic tiller and side visibility improve operator comfort and precision during use.


VDI Chart

	SPECIFICATION	REF	UNIT	VALUE
1.1	Manufacturer			EP
1.2	Model designation			ES15-15ES
1.3	Drive			Electric
1.4	Operator type			Pedestrian
1.5	Rated capacity	Q	kg	1500
1.6	Load centre distance	c	mm	600
1.8	Load distance, centre of drive axle to fork	x	mm	805
1.9	Wheelbase	y	mm	1240
2.1	Service weight		kg	755
2.2	Axle loading, laden front/rear		kg	805/1450
2.3	Axle loading, unladen front/rear		kg	545/210
3.1	Tyres			PU/PU
3.2	Tyre size, front		mm	Φ230×75
3.3	Tyre size, rear		mm	Φ80×60
3.4	Additional wheels (castor wheels)		mm	Φ130×55
3.5	Wheels, number front/rear (x=drive wheels)			1x +2/4
3.6	Tread width, front	b ₁₀	mm	538
3.7	Tread width, rear	b ₁₁	mm	400
4.2	Height, mast lowered	h ₁	mm	2128
4.4	Lift	h ₃	mm	322
4.5	Height, mast extended	h ₄	mm	7
4.9	Height drawbar in driving position min./max.	h ₁₄	mm	1740 /1480
4.15	Height, lowered	h ₁₃	mm	88
4.19	Overall length	l ₁	mm	1740
4.20	Length to face of forks	l ₂	mm	575
4.21	Overall width	b ₁ /b ₂	mm	800
4.22	Fork dimensions	s/e/l	mm	60x170x1150
4.2	Fork carriage width		mm	680
4	Distance between fork-arms		mm	570
4.32	Ground clearance, centre of wheelbase	b ₅	mm	28
5 4.34.1	Aisle width for pallets 1000×1200 crossways	m ₂	mm	2340

	SPECIFICATION	REF	UNIT	VALUE
4.34.2	Aisle width for pallets 800 × 1200 lengthways	Ast	T	2260
4.35	Turning radius	Wa	mm	1500
5.1	Travel speed, laden/unladen		mm	5/5
5.2	Lift speed, laden/unladen		km/h	0.13/0.2
5.3	Lowering speed, laden/unladen		m/s	0.13/0.13
5.8	Max. gradeability, laden/unladen		m/s	8/16
5.10	Service brake		%	Electromagnetic
6.1	Drive motor rating S2 60 min		kW	1.27
6.2	Lift motor rating at S3 15%		kW	3
6.4.1	Battery voltage		V	24
6.4.2	Battery nominal capacity K5		Ah	125
6.4.3	Battery type			AGM
6.5	Battery weight		kg	60
8.1	Type of drive unit			AC
10.5	Steering design			Mechanical
10.7	Sound pressure level at the driver's seat		dB(A)	74

Subject to modification of specifications and designs without prior notice as part of continuous product improvement. Images and technical data shown may include optional features and are provided for reference only. All dimensions are subject to standard manufacturing tolerances.

RATED CAPACITIES GRAPH

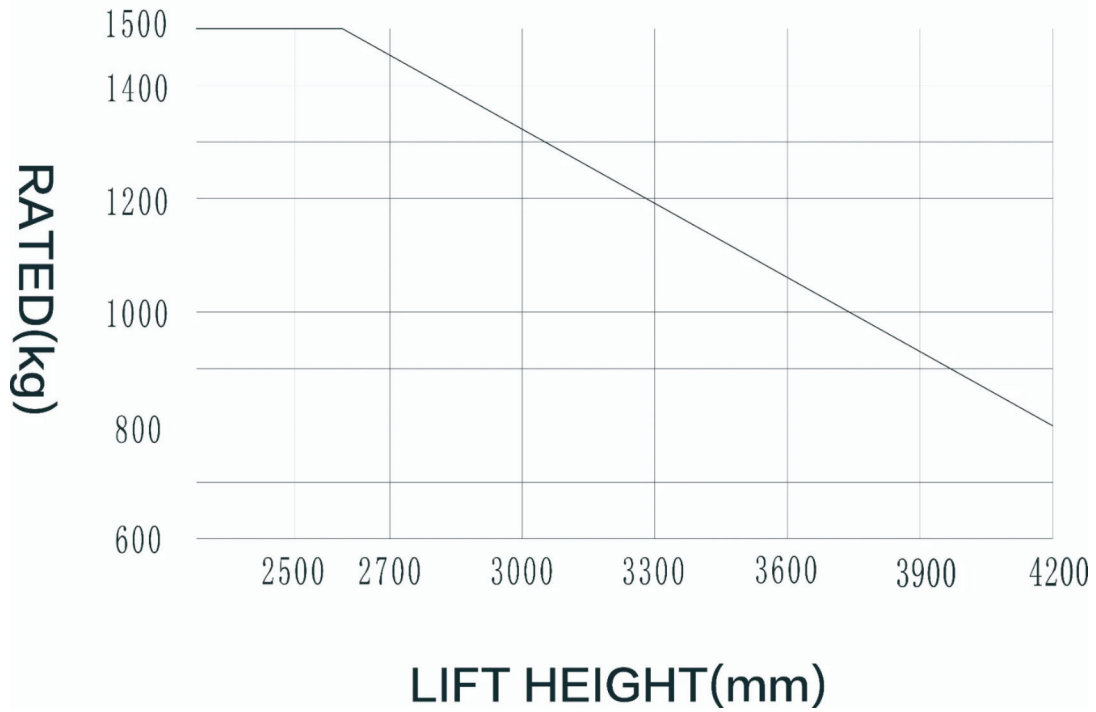

Mast Options

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)
2-Standard Mast	2515	1728	2943
2-Standard Mast	2715	1828	3143
2-Standard Mast	3015	1978	3443
2-Standard Mast	3315	2128	3743
2-Standard Mast	3615	2278	4043
2-Standard Mast	4015	2478	4443
2-Standard Mast	4165	2553	4593

Options

ITEM	OPTIONS (optional items marked in yellow)
Fork dimension	570*1150 570*1000 570*1220 685*1000 685*1150 685*1220

ITEM	OPTIONS (optional items marked in yellow)
Fork carriage width option	680mm 780mm
Load wheel type	Double
Load wheel material	PU
Drive wheel material	PU
Battery capacity	125Ah
Charger	24V-15A Internal
Battery indicator	With time
Handle head type	Hands big handle head
Castor wheels	Yes and not customized